


The A-2030D-AS is a high cost-performance mixer power amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

**■ SPECIFICATION**

\* 0 dB = 1 V

|                             |  |
|-----------------------------|--|
| Power Source                | 220 - 240 V ~ 50/60Hz  |
| Rated Output                | 30 W   |
| Power Consumption (EN60065) | 12 W (AC operation at 1/8 maximum output without clip)   |
| Frequency Response          | 50 - 20,000 Hz   |
| Distortion                  | Under 1% at 1 kHz, 1/3 rated power   |
| Input                       | MIC 1 - 3: -60 dB*, 600Ω, balanced, phone jack<br>AUX 1,2: -20 dB*, 10 kΩ, unbalanced, RCA pin jack                  |
| Output                      | Speaker out: Balanced (floating)<br>High impedance: 330 Ω (100 V)<br>Rec out: 0 dB*, 600 Ω, unbalanced, RCA pin jack |
| Phantom Power               | DC +21 V (MIC 1)   |
| S/N Ratio                   | Over 60 dB   |
| Tone Control                | Bass: ±10 dB at 100 Hz<br>Treble: ±10 dB at 10 kHz   |
| Muting                      | MIC 1: Mutes other input signals by 0 - 30 dB attenuation  |
| Indicator                   | Power, peak, signal  |
| Finish                      | Panel: ABS resin, black<br>Case: Steel plate, black  |
| Dimensions                  | 420 (W) X 100.6 (H) X 280.3 (D) mm (16.54" X 3.96" X 11.04")   |
| Weight                      | 4.0 kg (8.88 lb)   |

**■ APPEARANCE**

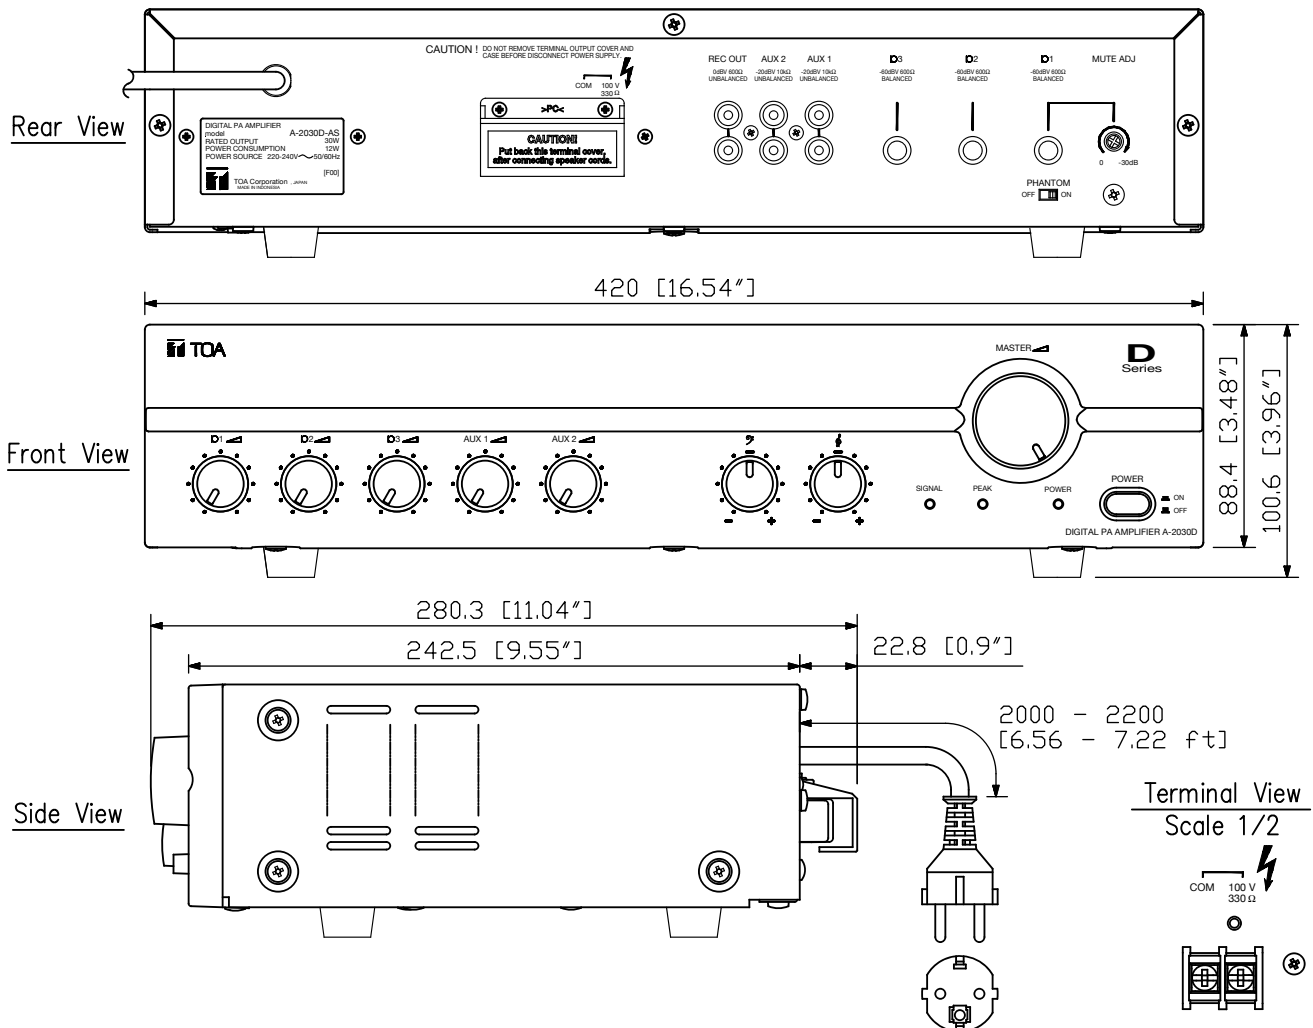

UNIT : mm SCALE : 1/3