


## DESCRIPTION

The SR-H3L Line array speaker forms a linear sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching transformer.

## SPECIFICATIONS

Enclosure	Bass-reflex type
Power Handling Capacity	Continuous program: 360 W
Rated Impedance	8 Ω
Sensitivity	95 dB (1 W, 1 m equivalent, measured at 8 m)
Frequency Response	110 Hz - 18 kHz (when recommended parameters are applied by the optional DP-SP3)
Directivity Angle	Horizontal: 90° Vertical: 0° (within the range of speaker height)
Speaker Component	7 cm (2.8") cone-type × 16
Input Connector	Removable input connector
Finish	Enclosure: MDF, white, urethane paint Front grille: Punched steel plate, white, acrylic paint
Dimensions	84 (W) × 1186.4 (H) × 115 (D) mm (3.31" × 46.71" × 4.53")
Weight	7.6 kg (16.75 lb)
Option	Matching transformer: MT-S0301 Extension plate: SR-EP3 Wall mounting bracket: SR-WB3 Wall tilt bracket: SR-TB3 Flying bracket: SR-FB3 Stand adapter: SR-SA3 (Applicable stand: ST-34B) Digital speaker processor: DP-SP3

## APPEARANCE

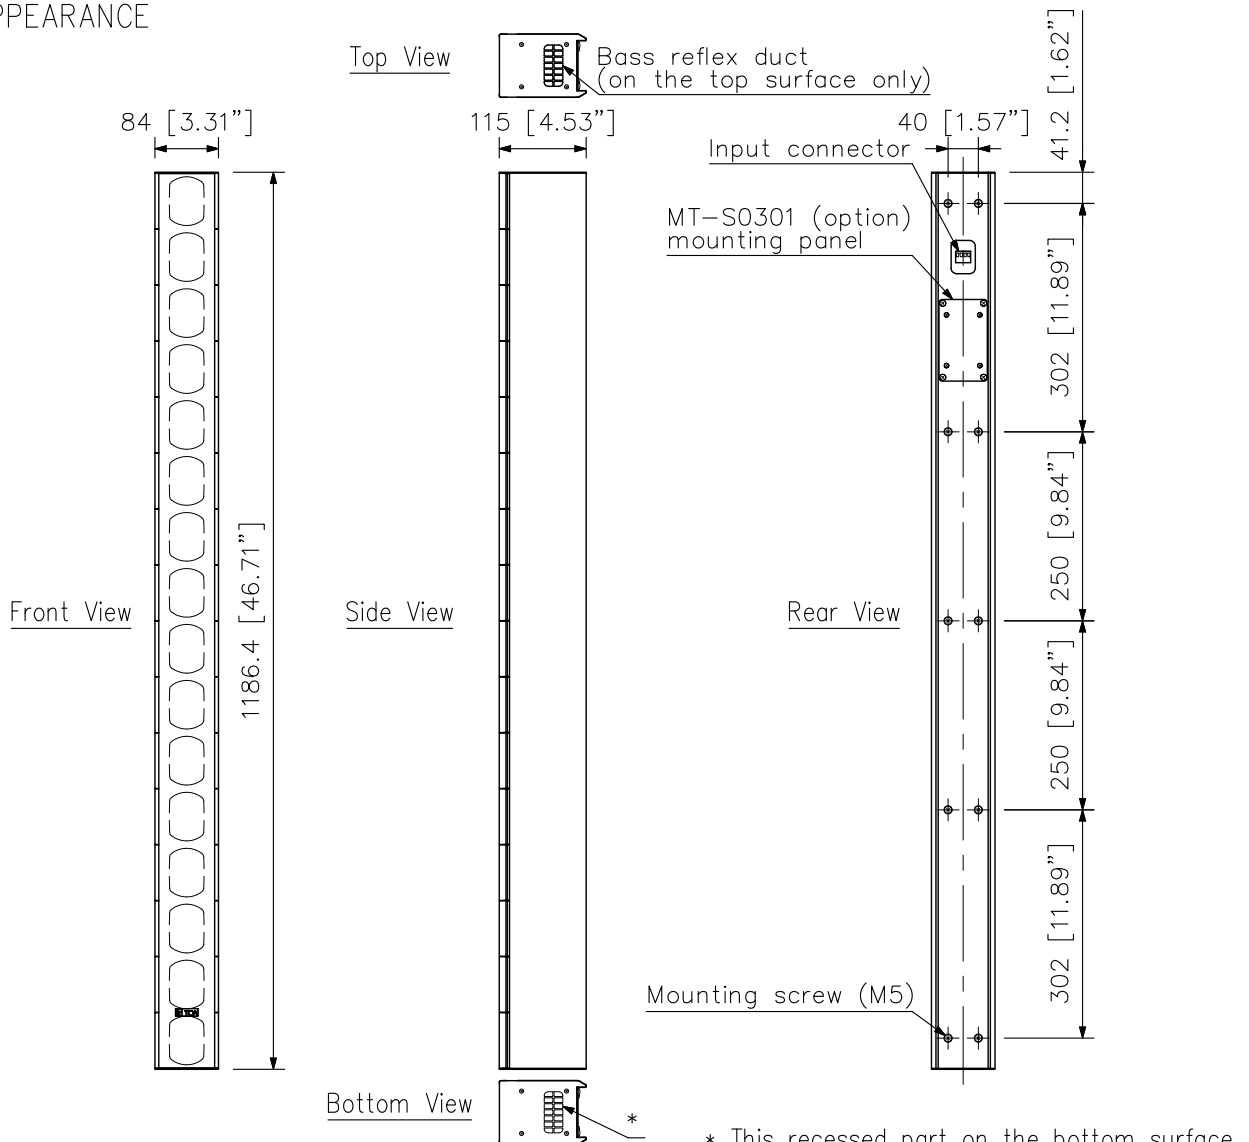

\* This recessed part on the bottom surface does not function as a bass reflex duct.

UNIT:mm SCALE:1/10