


DESCRIPTION

The SR-F04 is a 2-way passive speaker system for indoor-use. Properly-designed built-in passive network provides high quality sound and high output capability. The speaker can be used for many applications as permanent and temporary installations.

SPECIFICATIONS

System Type	2-way, Passive type, Bass-reflex type
Power Handling Capacity	Continuous pink noise: 80 W Continuous program: 240 W
Rated Impedance	8 Ω
Sensitivity	88 dB (1 W, 1 m)
Frequency Response	80 Hz - 20 kHz
Crossover Frequency	3 kHz
Directivity Angle	70° Conical
Speaker Component	Low frequency: 10 cm (4") cone-type × 2 High frequency: Compression driver fitted with CD horn
Connector	Neutrik NL4MPXX × 2, M4 screw terminal, distance between barriers: 11 mm (0.43")
Finish	Enclosure: Birch plywood, black, polyurea coating Grille: Steel plate, black, 40 % gloss, paint
Dimensions	165 (W) × 400 (H) × 177 (D) mm (6.5" × 15.75" × 6.97")
Weight	5.8 kg (12.79 lb)
Option	Speaker mounting bracket: HY-B0801, HY-UH04, HY-UV04 Ceiling mount bracket: HY-C0801 Speaker wall mount bracket: HY-W0801, HY-WM04 Speaker stand adapter: HY-ST04 Speaker stand: ST-34B

APPEARANCE

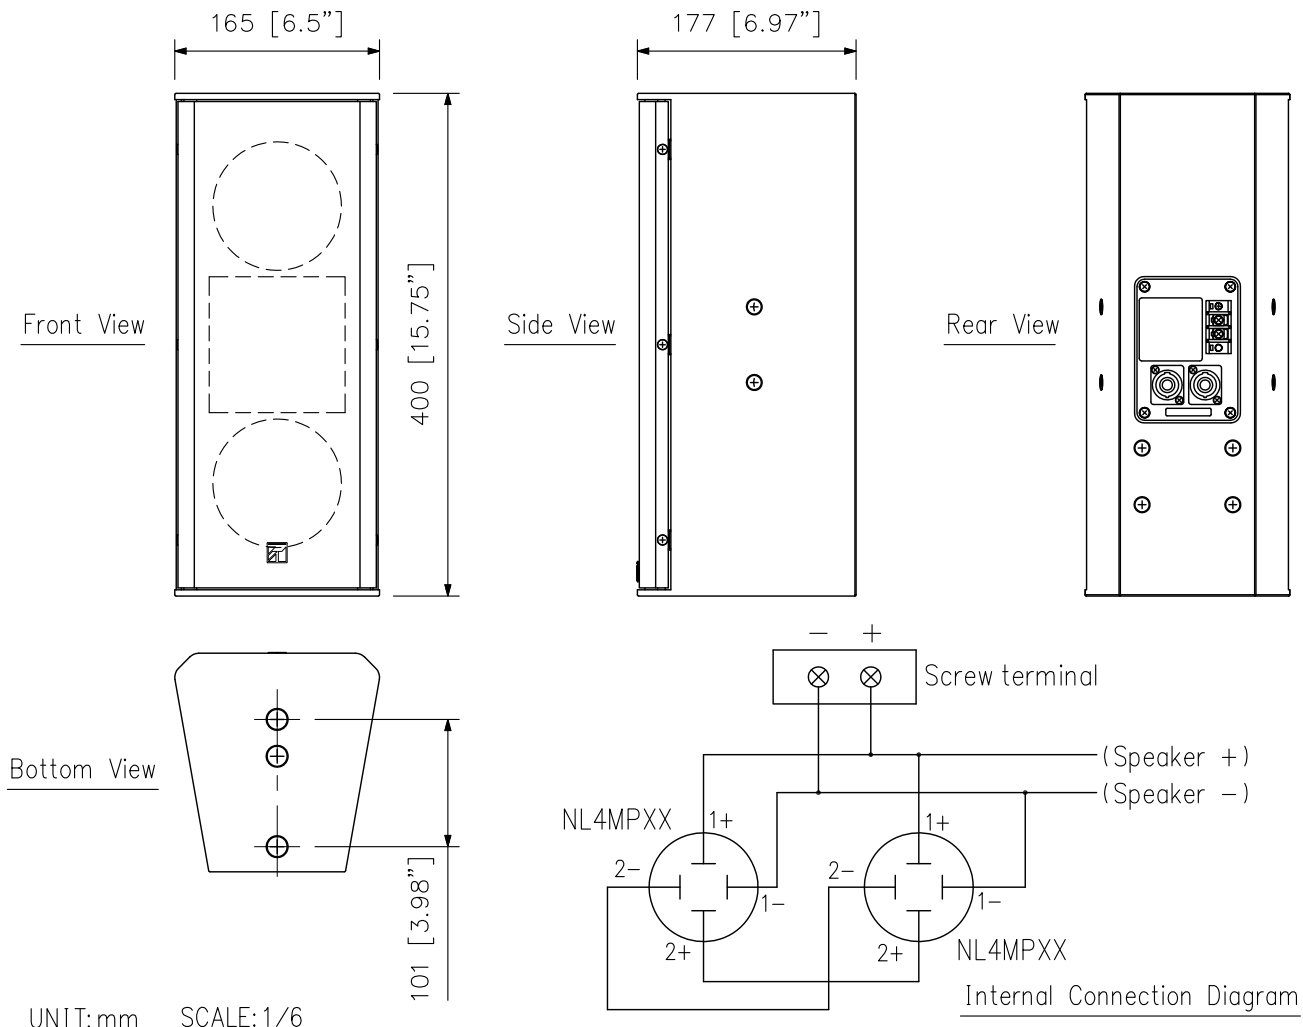

UNIT:mm SCALE:1/6

Internal Connection Diagram