


### DESCRIPTION

The BU-412 is a blower unit that is fixed to the top plate of the CR-273, CR-413 and CR-413-6 equipment racks.


### SPECIFICATIONS

Version	301H	314L
Power Source	220 - 240 V AC, 50/60 Hz	110 - 120 V AC, 50/60 Hz
Power Consumption	17 W	
Ventilation	Max. 1.98 m <sup>3</sup> /min (50 Hz), 2.15 m <sup>3</sup> /min (60 Hz)	
Automatic Operation	Thermal switch ON (When rack temperature exceeds +35 °C (95 °F)) Thermal switch OFF (When rack temperature drops below +30 °C (86 °F))	
Finish	Surface-treated steel plate	
Dimensions	300 (W) × 57.2 (H) × 240 (D) mm (11.81" × 2.25" × 9.45")	
Weight	1.4 kg (3.09 lb)	
Accessory	Fuse (0.315 A) ×1	Fuse (0.5 A) ×1
	Power cord (2 m (6.56 ft)) ×1	

### APPEARANCE

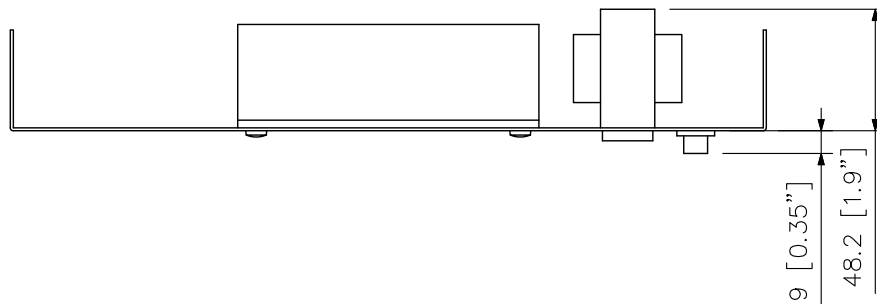


301H version

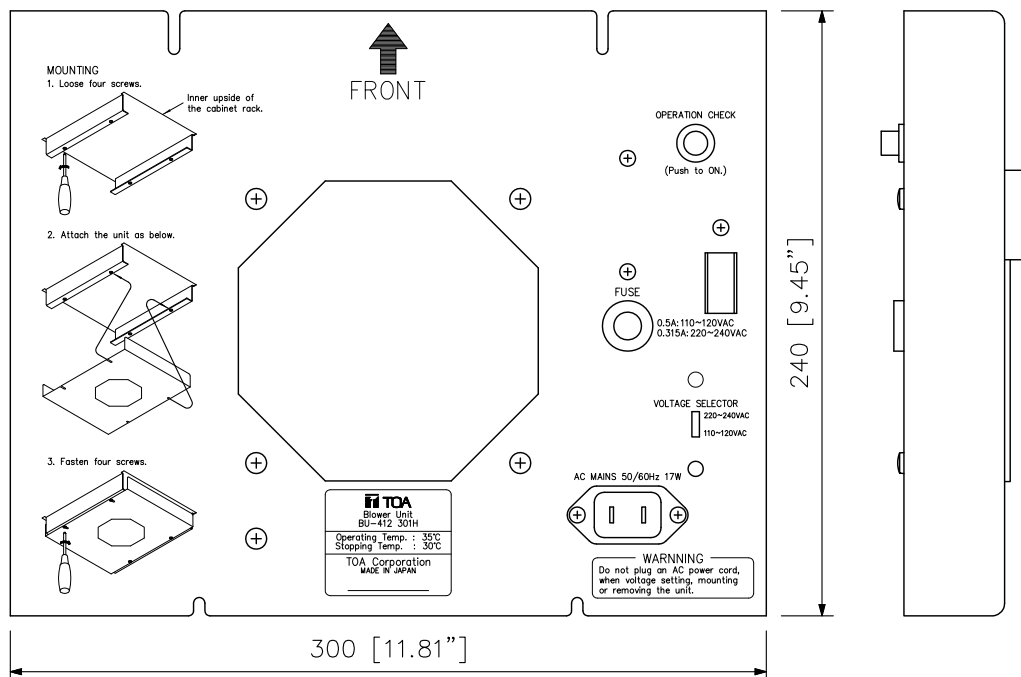

UNIT:mm SCALE:1/3

■ APPEARANCE

314L version

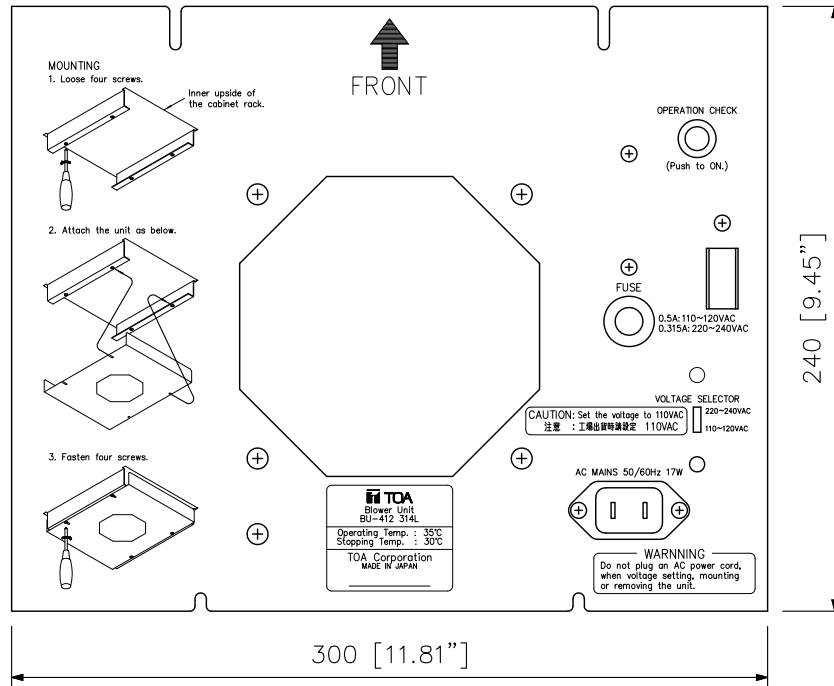

Version	AC plug
301H	
314L	