

### DESCRIPTION


TOA speaker selector SS-2010 is a 10 zone BGM and 10 zone paging speaker selector. This highly efficient speaker selector can be installed with the public address system in schools, malls, offices, and places requiring the selection of speakers.

### SPECIFICATIONS


Voltage Source	24 V DC	
Current Consumption	0.6 A DC	
Inputs	10 Inputs BGM	
	10 Inputs Paging	
Output	10 Outputs, each output channel max 480W at 100V line	
Controls	Front	10 BGM Selectors
		10 Paging Selectors
	Rear	1 All Call Selector for All Paging
		1-10 Paging Controls In
Indicator Led	10 BGM Selector LEDs	
	10 Paging Selector LEDs	
	1 All Call LED	
Operating Temperature	0°C to +40°C	
Finish	Front Panel : Aluminum Hair Line, Etching Black	
	Case : Steel Plate, Painting Black	
Dimensions	420 (W) X 44 (H) X 320 (D) in mm	
Weight	3.2 kg	
Accessories	6P Connectors (12 Pcs)	
	2P Connector (1 Pc)	

### APPEARANCE


Rear View

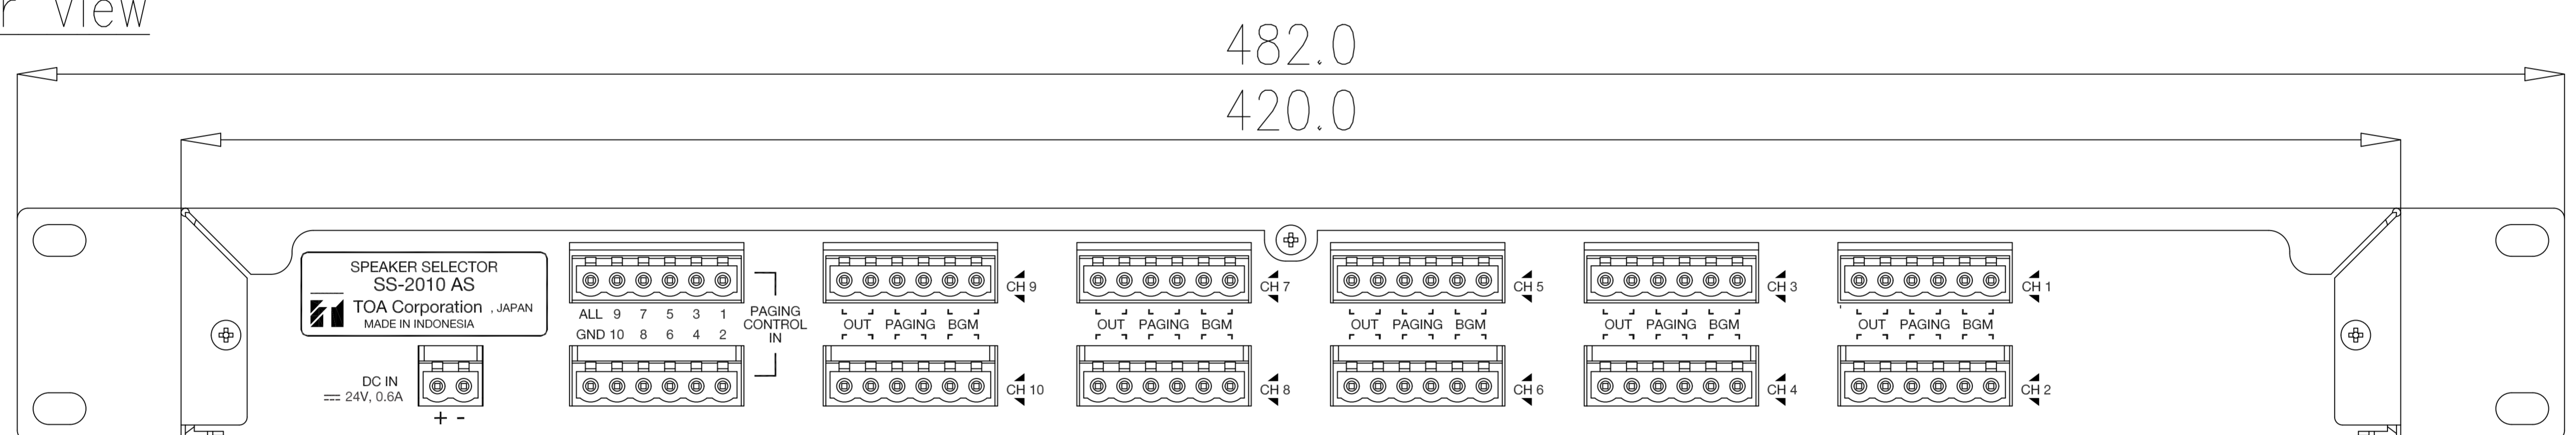

Front View

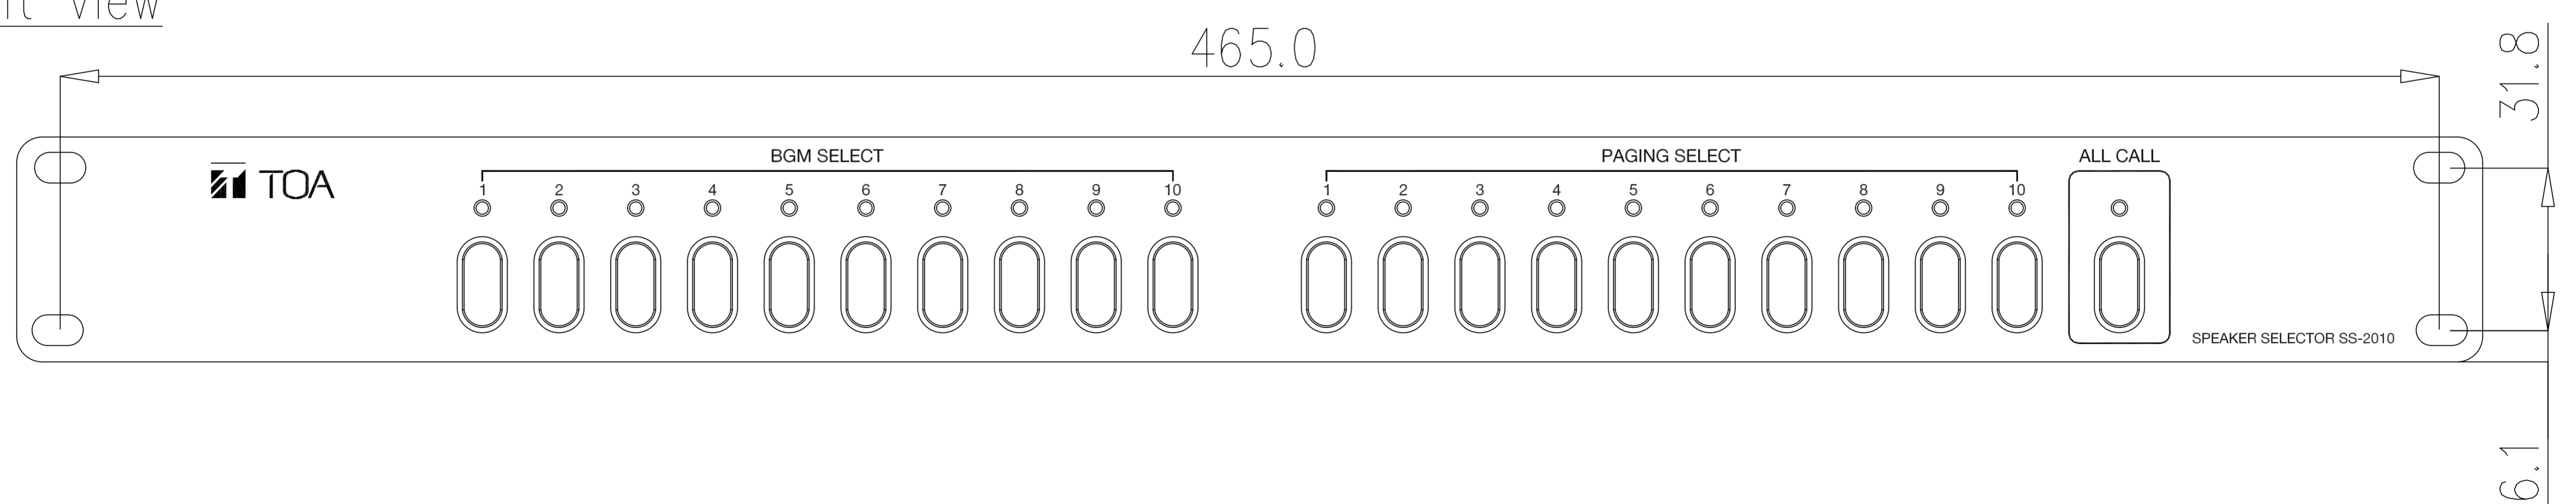

Side View

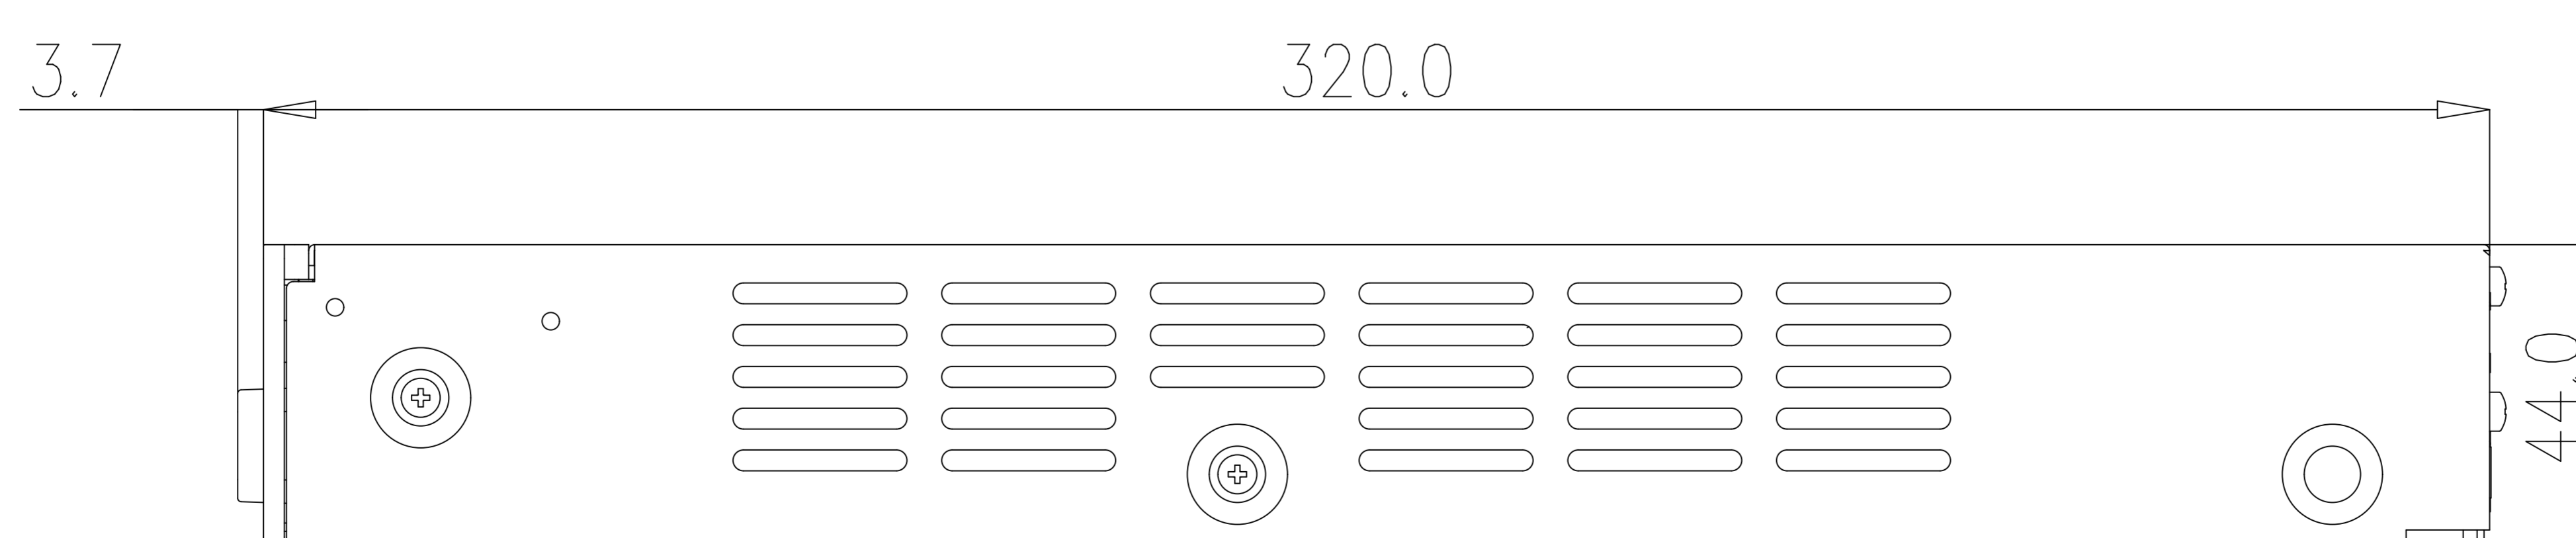

UNIT : mm SCALE : 1/3