

■DESCRIPTION


TOA speaker selector SS-1010 is a 10 input Zone and 1 input Emergency Override speaker selector. This highly efficient speaker selector can be installed with the public address system in schools, malls, offices, and places requiring the selection of speakers.

■SPECIFICATIONS


Voltage Source		24 V DC
Current Consumption		0.4 A DC
Inputs		10 Inputs Zone 1 Emergency Override
Output		10 Outputs Zone, Each output max 480W
Controls	Front	10 Zone Selectors 1 All Zone Selector for All Zone
	Rear	1-10 Zone Controls In
		All Zone Control In for All Zone
Indicator Led		10 Zone Selector LEDs 1 All Zone LED
Operating Temperature		0°C to +40°C
Finish		Front Panel : Aluminum Hair Line, Etching Black Case : Steel Plate, Painting Black
Dimensions		420 (W) X 44 (H) X 320 (D) in mm
Weight		3.2 kg
Accessories		6P Connectors (12 Pcs) 2P Connector (1 Pc)

■APPEARANCE


Rear View

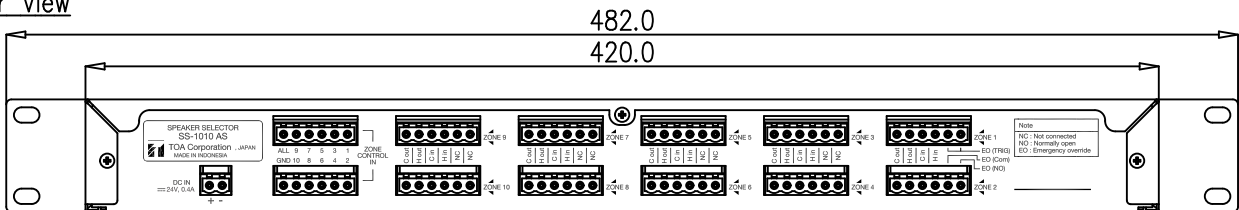

Front View

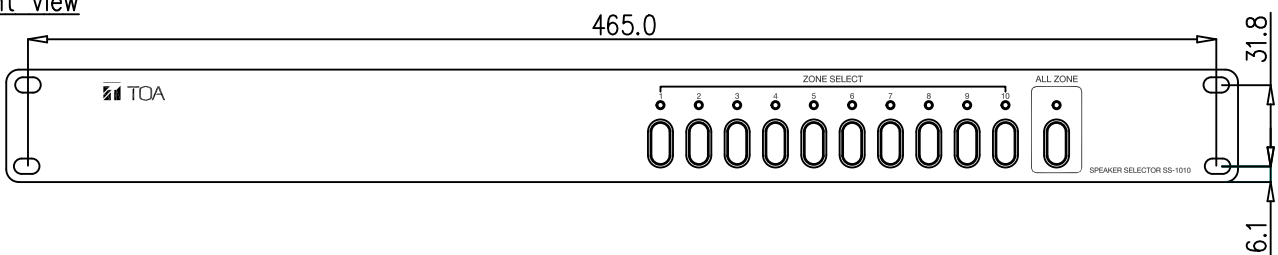

Side View

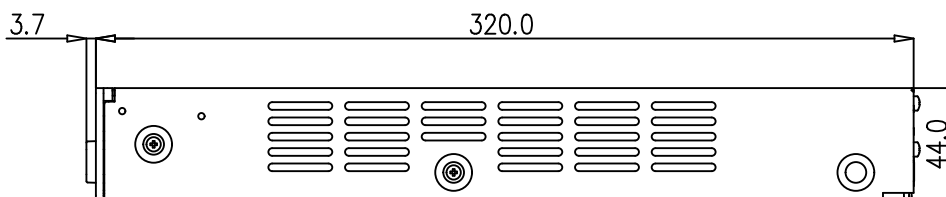

UNIT : mm SCALE : 1/3