

### ■DESCRIPTION

The DP-L2 is a digital audio processor equipped with 2 × Input, 2 × Output, 1 × ambient noise sensor microphone input and 1 × monitor output and features easy setting of each function by the front panel operation. It is equipped with an ambient noise control function (The ANC function distinguishes between the unit's output sound and the ambient noise. The unit's output sound is not detected as noise.) and an automatic level control function that keeps the input signal level constant. It can be mounted in an EIA Standard equipment rack (1 unit size).


### ■SPECIFICATIONS

\* 0 dB = 0.775 V

Power Source	220 – 240 V AC, 50/60 Hz
Power Consumption	20 W (220 mA)
Frequency Response	20 Hz – 20 kHz, ±1 dB
Sampling Frequency	48 kHz
Dynamic Range	108 dB (IHF-A weighted) or more
Distortion	0.006 % or less, 1 kHz, +4 dB* input/output (20 Hz – 20 kHz BPF)
Input	Sensor input (Ambient noise sensor microphone input) : +4/-48 dB* changeable, 10 kΩ, electronically-balanced, removable terminal block (4 pins), phantom power (+15 V DC, can be turned on or off with Phantom switch) with +15 V DC terminal Input 1,2: +4/-8/-20 dB* changeable, 15 kΩ, electronically-balanced, removable terminal block (3 pins)
Output	Monitor output: +4 dB*, 600 Ω, electronically-balanced, removable terminal block (3 pins) Output 1,2: +4 dB*, 600 Ω, electronically-balanced, removable terminal block (3 pins)
A/D Converter	24 bit
D/A Converter	24 bit
Signal Processing	
Automatic Level Control Function	Level meter (4 LED meters), Automatic input signal level control function, Automatic input sensitivity setting function: +4/-8/-20 dB*, Noise gate level setting: -99 to -3 dB
Ambient Noise Control Function	Level meter (4 LED meters), BGM/Announce level control function, Automatic sensor input reference level measuring function, Sensor input reference level fine adjustment function, Maximum output signal level control: -15 to 0 dB, Minimum output signal level control: -18 to -3 dB, Sample time setting: 10 s, 20 s, 30 s, 1 min, 5 min, Gain ratio setting: (Ambient noise: Output signal level) 6:3, 5:3, 4:3, 3:3, 3:4, 3:5, 3:6, Ambient noise measuring frequency setting: 20 Hz – 20 kHz, 3 points
Maximum Output Signal Level Control Function	-12, -6, 0, +4, +6, +12, +18, +24 dB*
Input Level Indicator	8 LEDs indicator
Output Level Indicator	8 LEDs indicator
Other Feature	
Operating Temperature	Phantom power switch (sensor input), Key lock function, Ground lift switch (INPUT 1, INPUT 2), Input/Output bypass function in power off
Operating Humidity	0 °C to +40 °C (32 °F to 104 °F)
Finish	90 %RH or less (no condensation)
Dimensions	Pre-coated steel plate, black, 30 % gloss
Weight	482 (W) × 44 (H) × 303 (D) mm (18.98" × 1.73" × 11.93")
Accessory	3.7 kg (8.16 lb)
	Removable terminal plug (4 pins)---1, Removable terminal plug (3 pins)---5, Power cord (2 m (6.56 ft)) ---1

Note: Prepare ambient noise sensor microphone separately.


■ APPEARANCE

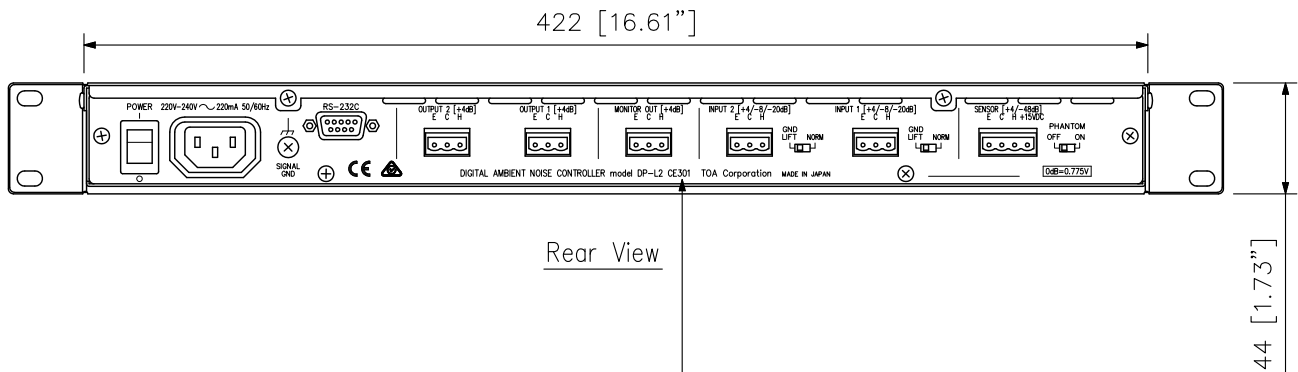


Rear View

Other product version CE-GB is available depending on the power cord type.

MODEL	CE301	CE-GB
AC plug		
RCM	applicable	-

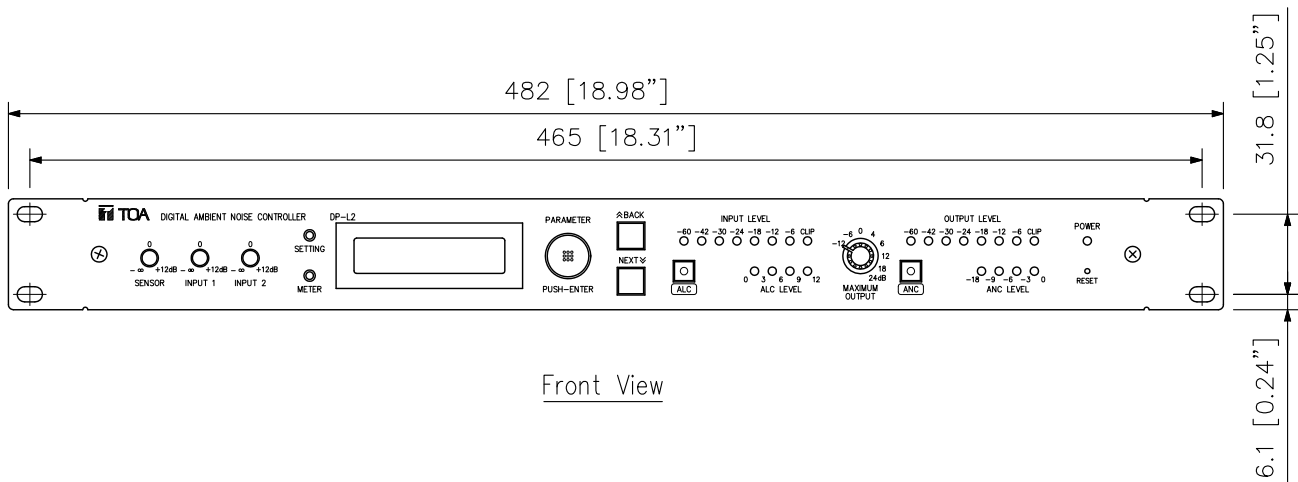

Front View

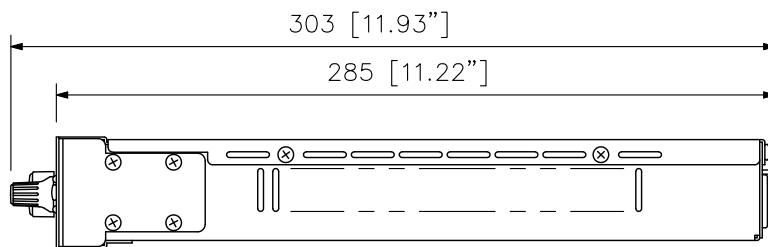

Side View

UNIT: mm SCALE: 1/3