

■DESCRIPTION


TOA's WM-2110 is a Desk-top Transmitter designed to use 470 MHz band radio signals.

■SPECIFICATIONS

*0 dB = 1 V

| | |
|--------------------------|---|
| Power Source | 230 V AC, 50 Hz |
| Power Consumption | 3 W |
| Modulation | Frequency modulation |
| Transmitting Frequencies | 470 MHz band (5 ch) (470.075, 470.150, 470.375, 470.625, 470.725 MHz) |
| RF Carrier Power | 5 mW |
| Oscillator | PLL synthesizer |
| Frequency Response | 150 - 6,000 Hz (Desk-top transmitter → Potable receiver) |
| Pre-emphasis | 50 μs |
| Input Level | Standard input: -54 dB*/-60 dB*/-66 dB* (Mic) -12 dB*/-18 dB*/-24 dB* (Line) Maximum input: -30 dB*/-36 dB*/-42 dB* (Mic) +12 dB*/+6 dB*/0 dB* (Line) Mic/Line selection, 600 Ω, unbalanced, phone jack |
| Remote Input | Make contact input: Release voltage: 2 V DC, short-circuit current: 0.2 mA, loop resistance: under 100 Ω Remote control mode: Transmit radio signal when at make |
| Operation Temperature | -10°C to +40°C |
| Finish | ABS Resin, dark gray |
| Dimensions | 140 (W) × 31 (H) × 119.5 (D) mm |
| Weight | 270 g |
| Accessory | AC-DC adapter (1.8 m)…1, Screw driver…1, 3-pole phone plug cord (2 m)…1 |

■APPEARANCE

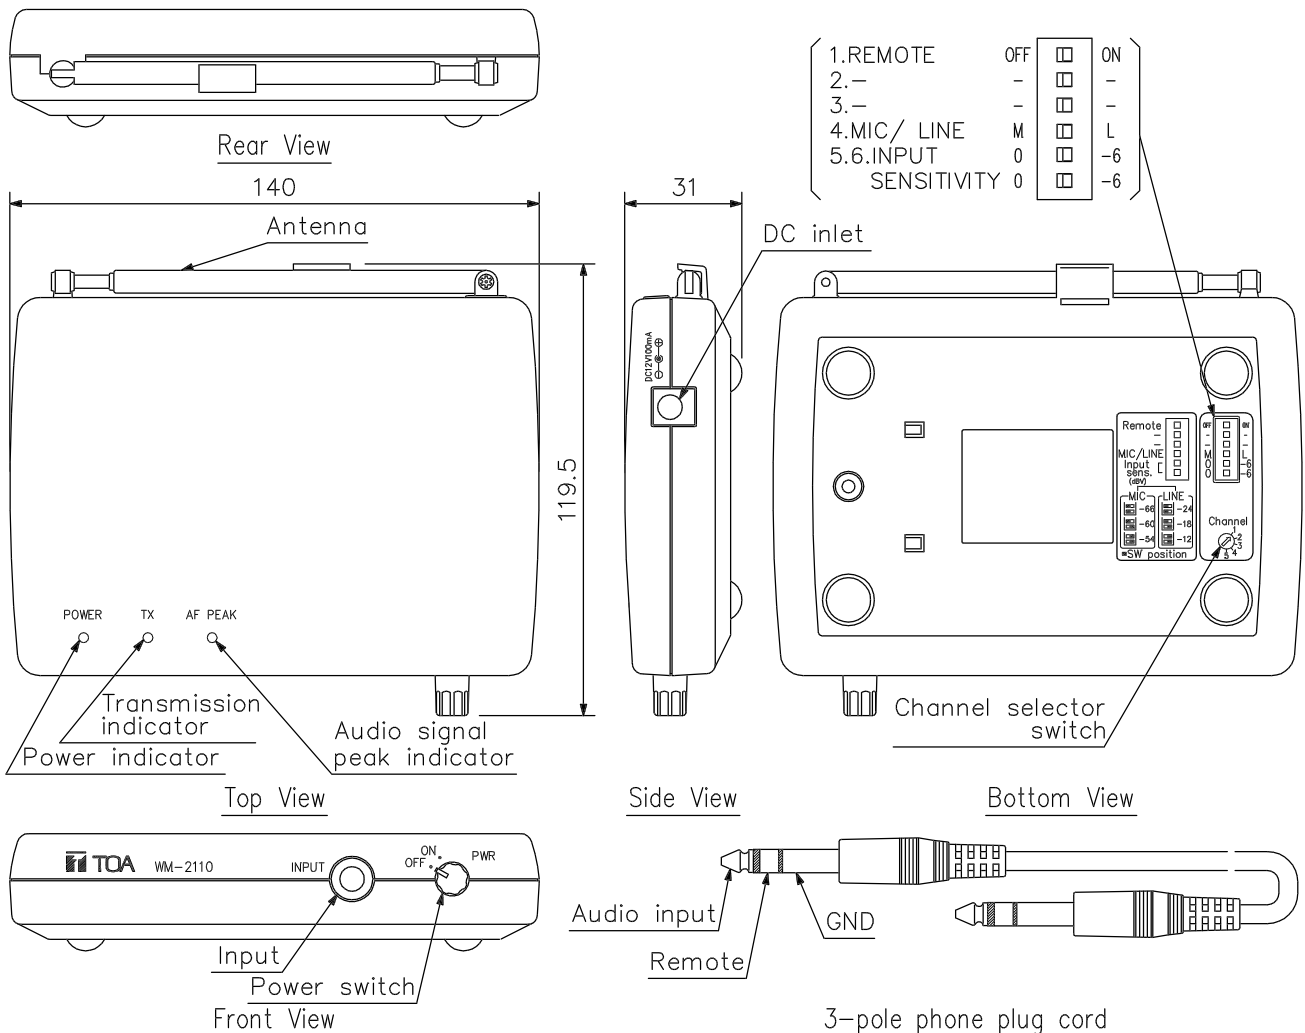

UNIT:mm SCALE:1/2