

## DESCRIPTION


Designed for exclusive use with the 9000M2 Series amplifier or M-864D, the ZM-9011 is a wall mounted remote control panel having 4 buttons. It is used in conjunction with the RC-001T Remote control module or M-864D. It can be mounted in an American standard 1-gang electrical box in the wall.

## SPECIFICATIONS

Power Source	24 V DC (supplied from RC-001T or M-864D)
Current Consumption	50 mA or less
Terminal	Removable terminal block (10 pins)
Connection Cable	Shielded CPEV cable (paired data line and paired power line) or Category 5 twisted pair cable for LAN (CAT5-STP)
Operating Section	4 function buttons
Indicator	4 function indicators (green LEDs)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	35 % to 80 %RH (no condensation)
Finish	Surface-treated steel plate, white, paint
Dimensions	72 (W) × 127 (H) × 49.5 (D) mm (2.83" × 5" × 1.95")
Weight	208 g (0.46 lb)
Accessory	Box mounting screw (No.6-32UNC × 30) ×2, Box mounting screw (M4 × 30) ×2, Panel mounting screw ×2, Removable terminal plug (10 pins) ×1

Note: Since no electrical box is supplied with the unit, prepare it separately.

## APPEARANCE

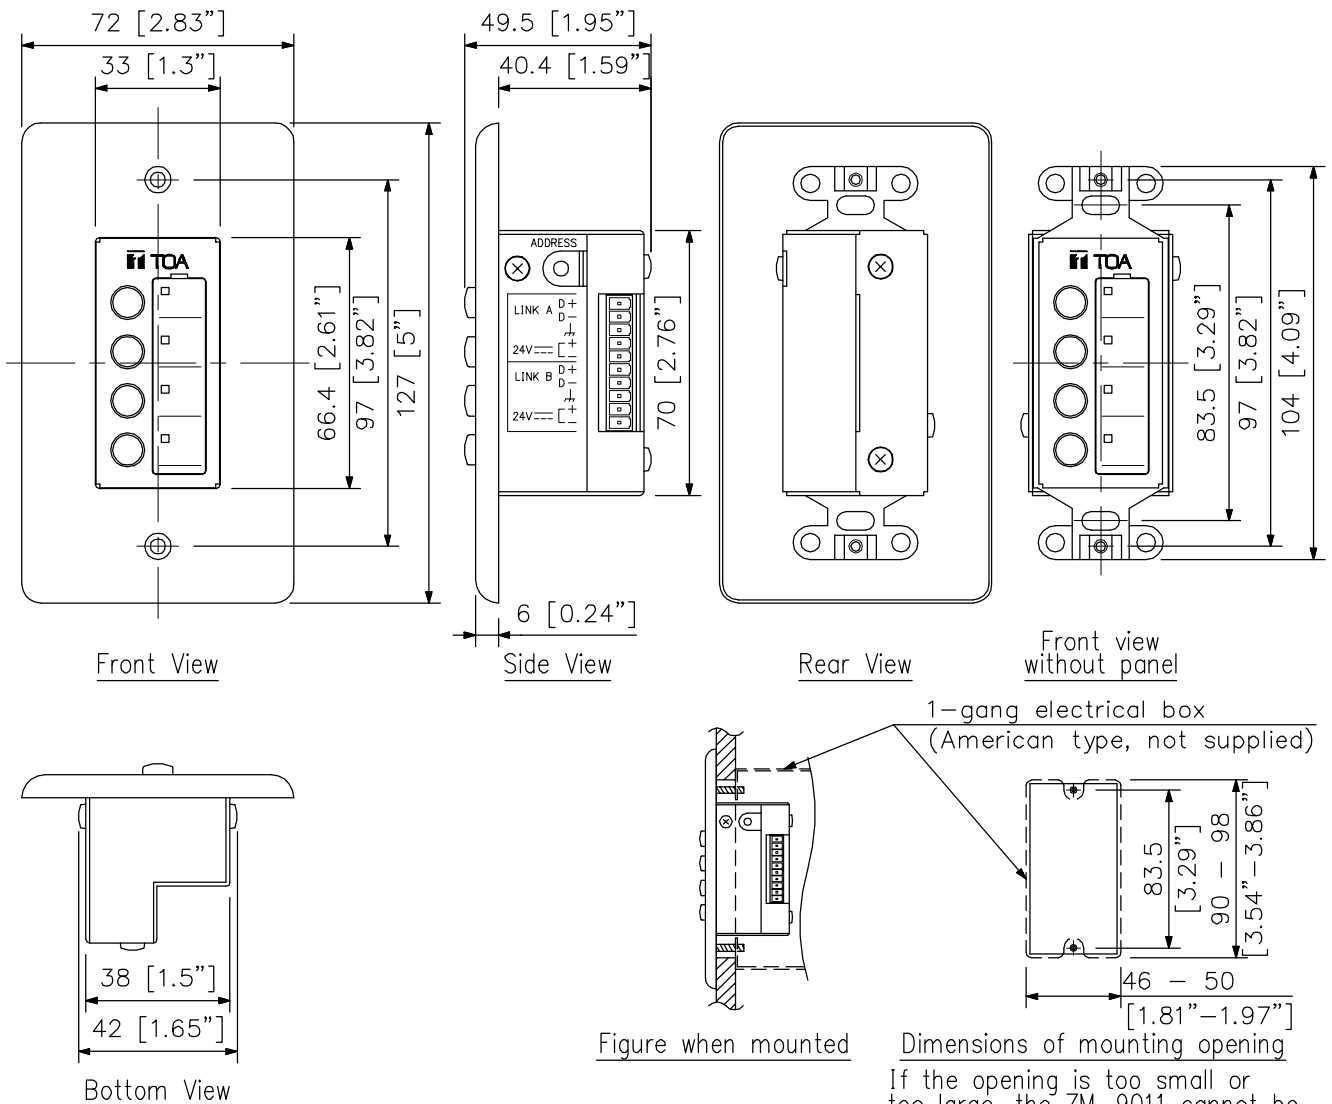

If the opening is too small or too large, the ZM-9011 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

UNIT:mm SCALE:1/2