


### DESCRIPTION

The DS-1000B is an emergency power supply panel that charges (trickle charge) external optional "dryfit" batteries in 24 hours. It also functions as a switcher to automatically or manually switch the power from AC to DC in the event of a power failure.


### SPECIFICATIONS

Power Source	220/240 V AC changeable 50/60 Hz
Current Consumption	150 VA
Applicable Batteries	A212/ 24G5 (12 V DC/ 24 Ah)×2 or A212/ 36G6 (12 V DC/ 36 Ah)×2 (Made by Accumulatorenfabrik Sonnenschein GmbH)
Charging Method	Trickle Charging
Charge Current	Max. 2.5 A
Operating Temperature	0 °C to +50 °C (32 °F to 122 °F)
Finish	Panel: Surface-treated steel plate, black, 30 % gloss, paint
Dimensions	483 (W) × 88 (H) × 281 (D) mm (19.02" × 3.46" × 11.06")
Weight	7 kg (15.44 lb)
Accessory	Rack mounting bracket ×2, M5 Rack mounting screw (with washer) ×4, M4 Binding head screw ×4, Fuse (T 10 A) ×2, Fuse (T 4 A) ×1, Fuse (T 2 A) ×1, Power cord (2 m (6.56 ft)) ×1, Label ×1


### APPEARANCE

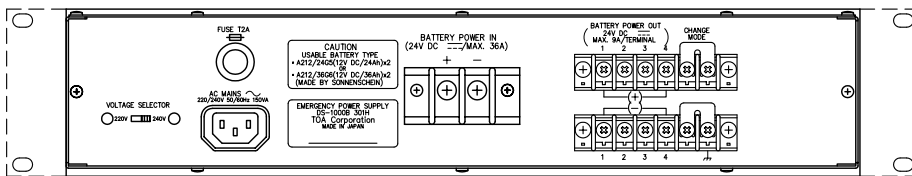


Rear View

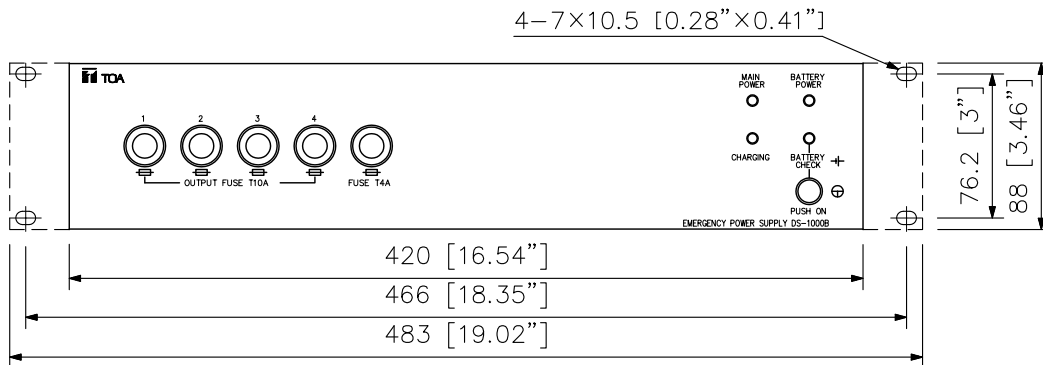

Front View

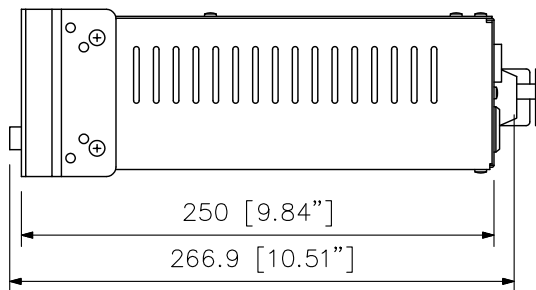

Side View



UNIT:mm SCALE:1/4